




For more information on our products and services visit our website at www.advanced-engineering-group.com



Woven Wire Screencloth Specifications Square Apertures - High Tensile Wire

Aperture [Imperial]	Aperture [mm]	Wire [mm]	Open Area %	Crimp Types
5"	125.0	12.50	82	DL
4"	100.0	11.20	81	DL
3 3/8"	85.0	11.20	78	IC
3"	75.0	11.20	76	DL
2 7/8"	70.0	10.00	77	IC
	68.8	8.00	80	IC
2 1/2"	63.0	12.50	70	DL
	63.0	10.00	75	DL
	63.0	8.00	79	DL
2 1/4"	57.0	10.00	73	DL
	55.0	8.00	77	DL
2"	50.0	10.00	70	DL
	50.0	8.00	74	DL
1 3/4"	45.0	10.00	67	DL
	45.0	8.00	72	DL
	42.0	7.10	73	DL
1 1/2"	39.0	10.00	64	SC
	39.0	8.00	69	DL
	38.0	7.10	71	DL
1 3/8"	35.5	10.00	61	SC
	35.0	8.00	66	SC
	32.0	7.10	67	DL
1 1/4"	31.5	10.00	58	SC
	31.5	8.00	64	SC
	30.0	7.10	65	DL
1 1/8"	28.5	6.30	67	SC
	28.0	8.00	60	SC
	28.0	7.10	64	SC
	26.1	6.30	65	SC
1"	25.7	5.00	70	SC
	25.3	7.10	61	SC
	25.0	8.00	57	SC
	25.0	6.30	64	DL
	24.0	8.00	56	SC
7/8"	22.7	6.30	61	SC
	22.1	7.10	57	SC
	21.7	6.30	60	SC
	21.5	5.00	66	DL
13/16"	20.2	6.30	58	SC
	20.2	5.60	61	SC
	19.2	6.30	57	SC
	19.0	5.00	63	DL
11/16"	18.4	5.60	59	SC
	17.7	6.30	54	SC
	17.3	5.00	60	SC
5/8"	16.0	6.30	52	SC
	16.0	5.60	55	SC
	16.0	5.00	58	SC
19/32"	15.3	5.00	57	SC
	15.5	5.60	54	SC
	15.0	4.00	62	SC
	14.6	5.60	52	SC

Aperture [Imperial]	Aperture [mm]	Wire [mm]	Open Area %	Crimp Types
35/64"	14.0	5.00	54	SC
	13.9	6.30	47	SC
	13.9	4.00	60	SC
17/32"	13.4	5.00	53	SC
	13.0	4.00	58	SC
1/2"	12.5	5.00	51	SC
	12.5	4.00	58	SC
15/32"	12.0	6.30	43	SC
	12.0	5.00	50	SC
	11.8	4.00	56	SC
	11.5	5.00	49	SC
7/16"	11.2	4.00	54	SC
	11.2	3.15	61	SC
	10.8	4.00	53	SC
	10.7	6.30	39	SC
13/32"	10.6	5.00	45	SC
	10.4	4.00	52	SC
	10.2	4.00	52	SC
	9.9	4.00	51	SC
	9.7	4.00	50	SC
	9.7	3.15	57	SC
11/32"	9.0	3.15	55	SC
	8.9	4.00	48	SC
5/16"	8.4	4.00	46	SC
	8.0	3.15	51	SC
	7.9	4.00	44	SC
9/32"	7.2	4.00	41	SC
	7.1	2.80	51	SC
	6.8	3.15	47	SC
1/4"	6.4	4.00	38	SC
	6.2	3.15	44	SC
	6.0	2.50	50	SC
15/64"	5.8	3.15	42	SC
	5.7	2.80	45	SC
3/16"	5.1	2.80	42	SC
	5.0	2.50	44	SC
	4.9	2.80	41	SC
	4.9	2.50	44	SC
	4.9	2.00	50	SC
	4.7	3.15	36	SC
11/64"	4.5	2.20	45	SC
	4.4	2.50	41	SC
	4.3	2.00	47	SC
5/32"	4.0	2.50	38	SC
	3.8	2.50	36	SC
	3.8	2.00	43	SC
1/8"	3.4	2.00	40	SC
	3.2	2.00	38	SC
	3.0	2.00	36	SC
	3.0	1.50	43	SC
3/32"	2.5	1.50	39	SC
5/64"	2.0	1.25	38	SC

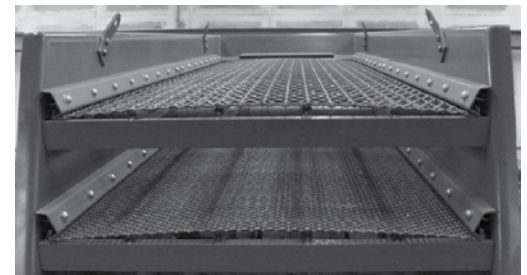

Crimp Types

- DL** = Double Lock
- IC** = Inter Crimp
- SC** = Single Crimp

Varying apertures, wire diameters and crimp types are available upon request, ask one of our expert sales representatives for further information.

Australia
P 61 7 3713 7744
F 61 7 3713 7788

sales@advanced-eng.com.au

New Zealand
P 0800 880 233
F 0800 880 234

sales@advanced.eng.co.nz